

Singlemode Preform 09/125


Compliance

j-fiber Singlemode Preform specification is in compliance with ITU-T: G.652.B, and IEC: B1.1.

Characteristics

	Spec. Value Range	Unit
Core Composition	SiO ₂ /GeO ₂	
Refractive Index Profile	nearly matched clad	
Refractive Index Delta	3.65×10^{-3}	
Tolerance of Delta within a Rod	0.35×10^{-3}	
Preform Diameter (O.D.)	49.0 or 70.0	mm
Tolerance of O.D. from Rod to Rod	± 2.0	mm
Tolerance of O.D. within a Rod	± 0.5	mm
Preform Length	600 - 1200	mm
Preform Bow	≤ 0.7	mm/m
Preform Non-Circularity	≤ 1.0	%
Clad Concentricity Error of O.D.	≤ 0.6	%

Design

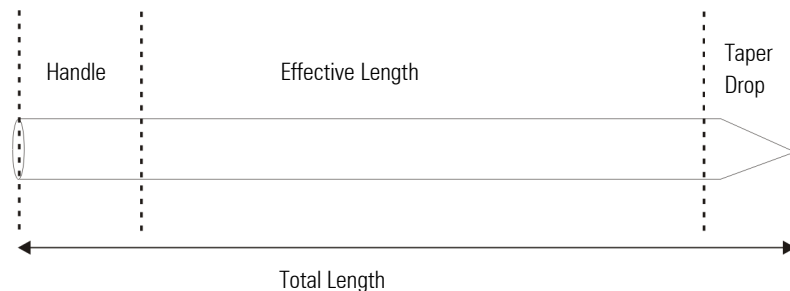

For further information about our Singlemode Preforms and other j-fiber products and services, please contact us:

j-fiber GmbH
 Im Semmicht 1
 D-07751 Jena, Germany
 Tel.: +49-3641-352 100
 Fax: +49-3641-352 101
 Email: info@j-fiber.com
 Internet: www.j-fiber.com

- The drop end (Taper) is formed as a cone and the "handle end" is a tube with the same diameter as the preform.

$$O.D._{handle} = O.D._{preform}$$

Appearance

The general appearance shall be dustfree and flawless. There shall be no bubbles in the core. Bubbles in the cladding shall be permitted but the number and size(s) of the bubbles shall not exceed the values stipulated in the table below. There shall be no substantial surface damage or contamination.

Bubble Size s/mm

		Acceptable Number per Preform
In the core		not allowed
In the cladding	$s \leq 0.3$	no count
	$0.3 < s \leq 0.8$	5
	$0.8 < s \leq 2.0$	2
	$s > 2.0$	0

Mass

- Chargeable mass (m) is calculated with the formula:

$$m[g] = 2.2 \times 3.14 \times (\text{outer diameter [cm]}/2)^2 \times (\text{effective length [cm]}) \times 2.2$$

2.2 = specific weight of SiO₂ [g/cm³]

- The "effective length" is the length of that piece of the preform where every parameter is within stated preform specifications.

Target Fiber Specifications

	Specified Values	Unit
Cladding Diameter	125 ± 1.0	μm
Cladding Non-Circularity	≤ 1.0	%
Core Non-Circularity	≤ 6.0	%
Uniformity of Attenuation (OTDR)	≤ 0.05	dB/km
Mode Field Diameter (1310 nm)	8.8 - 9.6	μm
Cut-Off Wavelength	1190 - 1330	nm
Zero Dispersion Wavelength	1302 - 1322	nm
Core/Clad Concentricity Error	≤ 0.8	μm
Attenuation	1310nm	dB/km
	1550nm	
	1383nm	

j-fiber does not guarantee the following parameters as they are dependent upon individual draw conditions:

- fiber yield
- fiber strength

Expected Fiber Length

The expected fiber length (L[km]) assuming a 100% drawing yield can be calculated using the following formula:

$$L[\text{km}] = \left\{ \left(\frac{d[\text{mm}]}{0.125} \right)^2 \times e[\text{mm}] \right\} \times 10^{-6}$$

d = preform diameter
e = effective preform length

Inspection Documents

Preform ID	Length of Handle End
Mass	Diameter Typical
Effective Length	Diameter Max
Length of Drop End	

The inspection documents will be supplied with each shipment. The preform data can also be transmitted electronically and precede each shipment (MS Windows, floppy disk, email etc.)

Packaging

Every preform is individually packaged as such to withstand normal transportation hazards and handling.

Each preform is identified by an ID number written on an adhesive label.

Ordering Information

To order j-fiber optical preform please call, fax or email us and specify the following parameters:

Preform Type: j-fiber Singlemode Preform 09/125

Preform Diameter: 49.0mm or 70.0mm

Preform Quantity: kg

Other: desired ship date, special requests

All fibers and preforms are subject to j-fiber's ongoing process and quality improvement programs ensuring excellent performance and high reliability. We reserve the right to make changes to the above specification without notice.

DB-PS-001-00-0804 Issued August 2004

Copyright 2004 © j-fiber GmbH

Officially registered facility according to EWG No. 761/2001

